

1.2.3 High Energy Pyroelectric Sensors

100µJ to 40J

Features

- Sensors with diffuser for high energies and high energy densities
- BF coating for highest damage threshold
- BB coating for spectral flatness
- Wide spectral range. Measure YAG and harmonics and many more.
- Rep rates up to 250Hz
- Measure lasers with pulse widths up to 20ms
- PE50BF-DIFH-C sensor - highest damage threshold

PE50BF-DIF-C / PE50BF-DIFH-C



PE50BB-DIF-C

DIFFUSER IN


DIFFUSER OUT




| Model | PE50BF-DIF-C / PE50BF-DIFH-C | | | | | PE50BB-DIF-C | | | | | |
|--|--|------------|----------------|-------------|-------------|--|-------------|-------------|---|------------|------------------|
| Use | Complete calibration curve. Highest damage threshold | | | | | Removable diffuser. Spectrally flat | | | | | |
| Diffuser | Fixed | | | | | Diffuser out | | | | | Diffuser in |
| Aperture mm | Ø35 | | | | | Ø46 | | | | | Ø33 |
| Absorber Type | BF with diffuser | | | | | BB | | | | | BB with diffuser |
| Spectral Range µm ^(a) | 0.19 – 2.2, 2.94 | | | | | 0.19 – 20 | | | | | 0.4 – 2.5 |
| Surface Reflectivity % approx. | 25 | | | | | 5 | | | | | 15 |
| Calibration Accuracy +/-% ^(a) | 3 | | | | | 3 | | | | | 3 |
| Max Pulse Width Setting ^(d) | 1ms | 2ms | 5ms | 10ms | 20ms | 3ms | 10ms | 20ms | 3ms | 10ms | 20ms |
| Energy Scales | 10J to 2mJ | 10J to 2mJ | 10J to 20mJ | 10J to 20mJ | 10J to 20mJ | 10J to 2mJ | 10J to 20mJ | 10J to 20mJ | 40J to 8mJ | 40J to 8mJ | 40J to 8mJ |
| Lowest Measurable Energy mJ ^(c) | 0.2 | 0.4 | 0.8 | 0.8 | 0.8 | 0.1 | 0.1 | 0.2 | 0.5 | 5 | 5 |
| Max Pulse Width ms | 1 | 2 | 5 | 10 | 20 | 3 | 10 | 20 | 3 | 10 | 20 |
| Maximum Pulse Rate pps | 250Hz | 100Hz | 50Hz | 40Hz | 20Hz | 40Hz | 10Hz | 5Hz | 40Hz | 10Hz | 5Hz |
| Noise on Lowest Range µJ | 40 | 80 | 200 | 200 | 200 | 15 | 15 | 20 | 40 | 60 | 80 |
| Additional Error with Frequency % | ±1% | ±1% | ±1% | ±2% | ±2% | ±1% | ±1% | ±1% | ±1% | ±1% | ±1% |
| Linearity with Energy for >7% of full scale ^(c) | ±2% | | | | | ±2% | | | | | |
| Damage Threshold J/cm ² ^(b) | PE50BF-DIF-C | | PE50BF-DIFH-C | | | Diffuser out | | | Diffuser in | | |
| <100ns | 4 | | 6 | | | 0.3 | | | 3 | | |
| 1µs | 5 | | 8 | | | 0.3 | | | 3 | | |
| 300µs | 20 | | 30 | | | 1 | | | 10 | | |
| 2ms | 60 | | 90 | | | 2 | | | 20 | | |
| Maximum Average Power W | 25, 40 with optional heat sink | | | | | 10, 15 with optional heat sink | | | 30, 50 with optional heat sink | | |
| Maximum Average Power Density W/cm ² | 200 | | | | | 10 | | | 500 | | |
| Uniformity over surface | ±2.5% over central 20mm | | | | | ±2% over 70% of diameter | | | ±2.5% over central 20mm | | |
| Weight kg | 0.25 | | | | | 0.25 | | | | | |
| Compliance | CE, China RoHS | | CE, China RoHS | | | CE, China RoHS | | | | | |
| Version | | | | | | | | | | | |
| Part Number | 7Z02940 | | 7Z02943 | | | 7Z02947 | | | | | |
| Notes: (a) Calibration accuracy at various wavelengths as specified here. | Specified wavelengths: 355nm, 532nm, 1064nm and 2100nm. | | | | | Calibrated at 1064nm | | | Calibrated at 1064nm, 532nm and 2100nm only. Calibration accuracy at 2100nm, ±5%. | | |
| At other wavelengths, there may be an additional error up to the value given. | Additional uncertainty at other wavelengths in the range 248nm – 2100nm and 2940nm is ±2%. <240nm not calibrated. | | | | | Max additional error at other wavelengths is ±2% | | | | | |
| Notes: (b) | For wavelengths >2.1µm, derate to 10% of above values. For wavelengths below 600nm, derate to 60% of given values (for DIFH 50% of given values). For wavelengths below 240nm, derate to 1J/cm ² . For beam size <=5mm. For 10mm beam, derate DIF to 80% and DIFH to 70% of above. | | | | | | | | | | |
| Notes: (c) With the "user threshold" setting set to minimum. For other settings, the spec is for >7% of full scale or greater than twice the "user threshold", whichever is greater. The user threshold is not available with LaserStar, Nova/Orion, Pulsar, USBI and Quasar. For these meters, the threshold is set to minimum and the linearity spec is >10% of full scale. The PE-C series will only operate with Nova or Orion meters with an additional adapter Ophir P/N 7Z08272 (see page 103). The adapter can introduce up to 1% additional measurement error. The user threshold feature allows adjustment of the internal threshold up to 25% of full scale if desired to avoid false triggering in noisy environments. For further information, see the FAQs on our Website. | | | | | | | | | | | |
| Notes: (d) With the LaserStar, Pulsar, USBI, Quasar and Nova/Orion with adapter only 2 of the pulse width settings are available. For the PE-BF models the 1ms and 10ms settings and for the PE-BB model the 3ms and 10ms settings. Furthermore, with the diffuser mounted, the sensor may saturate at lower than the maximum energy in some cases. Therefore it is recommended to use these sensors with the newer meters/PC interfaces. | | | | | | | | | | | |

* For drawings please see page 99


PE25-C / PE25BF-C

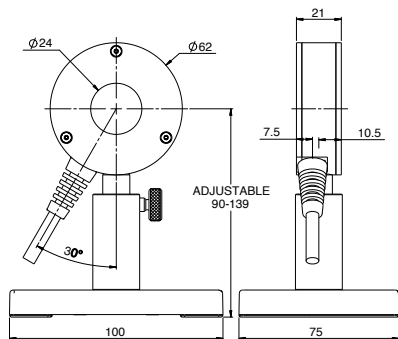


PE50-C / PE50BF-C

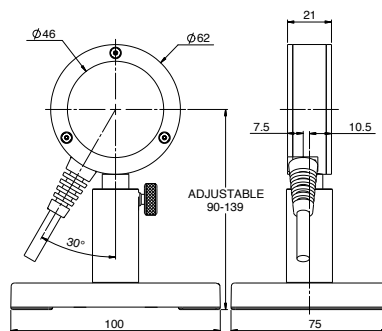


PE25BF-DIF-C

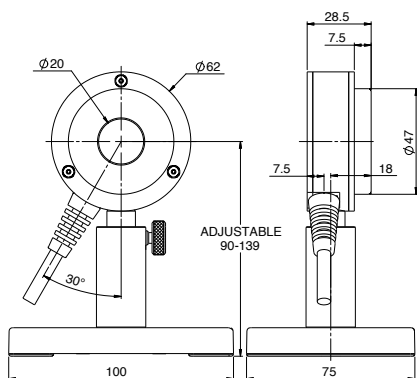

PE50BF-DIF-C / PE50-DIF-C

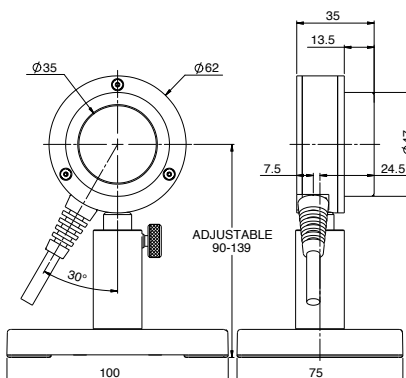

PE50BF-DIFH-C

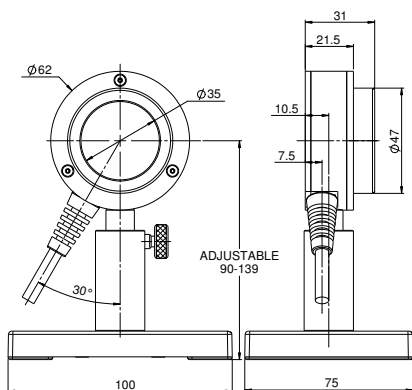

PE50BB-DIF-C

